

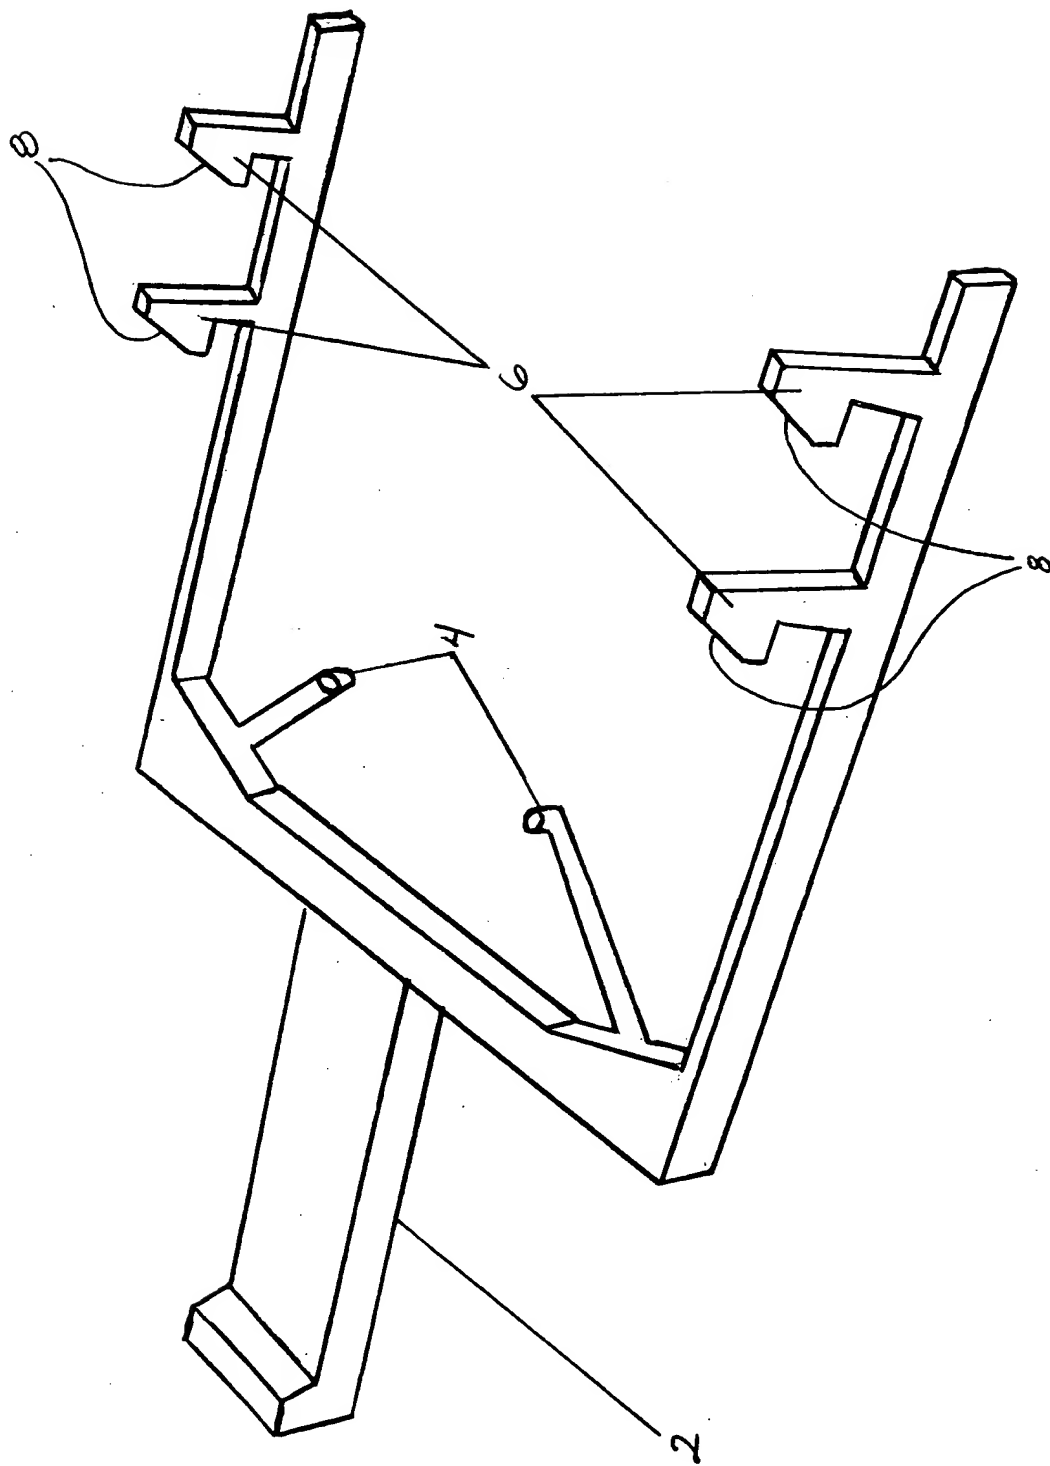
[illegible]

FIG. 2 is a cross-sectional view of the apparatus. It shows a vertical support rod 12 extending from a base 14. A horizontal plate 16 is mounted on the rod. The apparatus is housed within a frame with side rails 20. Various internal components are labeled with numbers 18, 22, and 30. Dashed lines indicate internal features and the position of the rod within the frame.

FIG. 2



U.S. Pat. 3,342,600

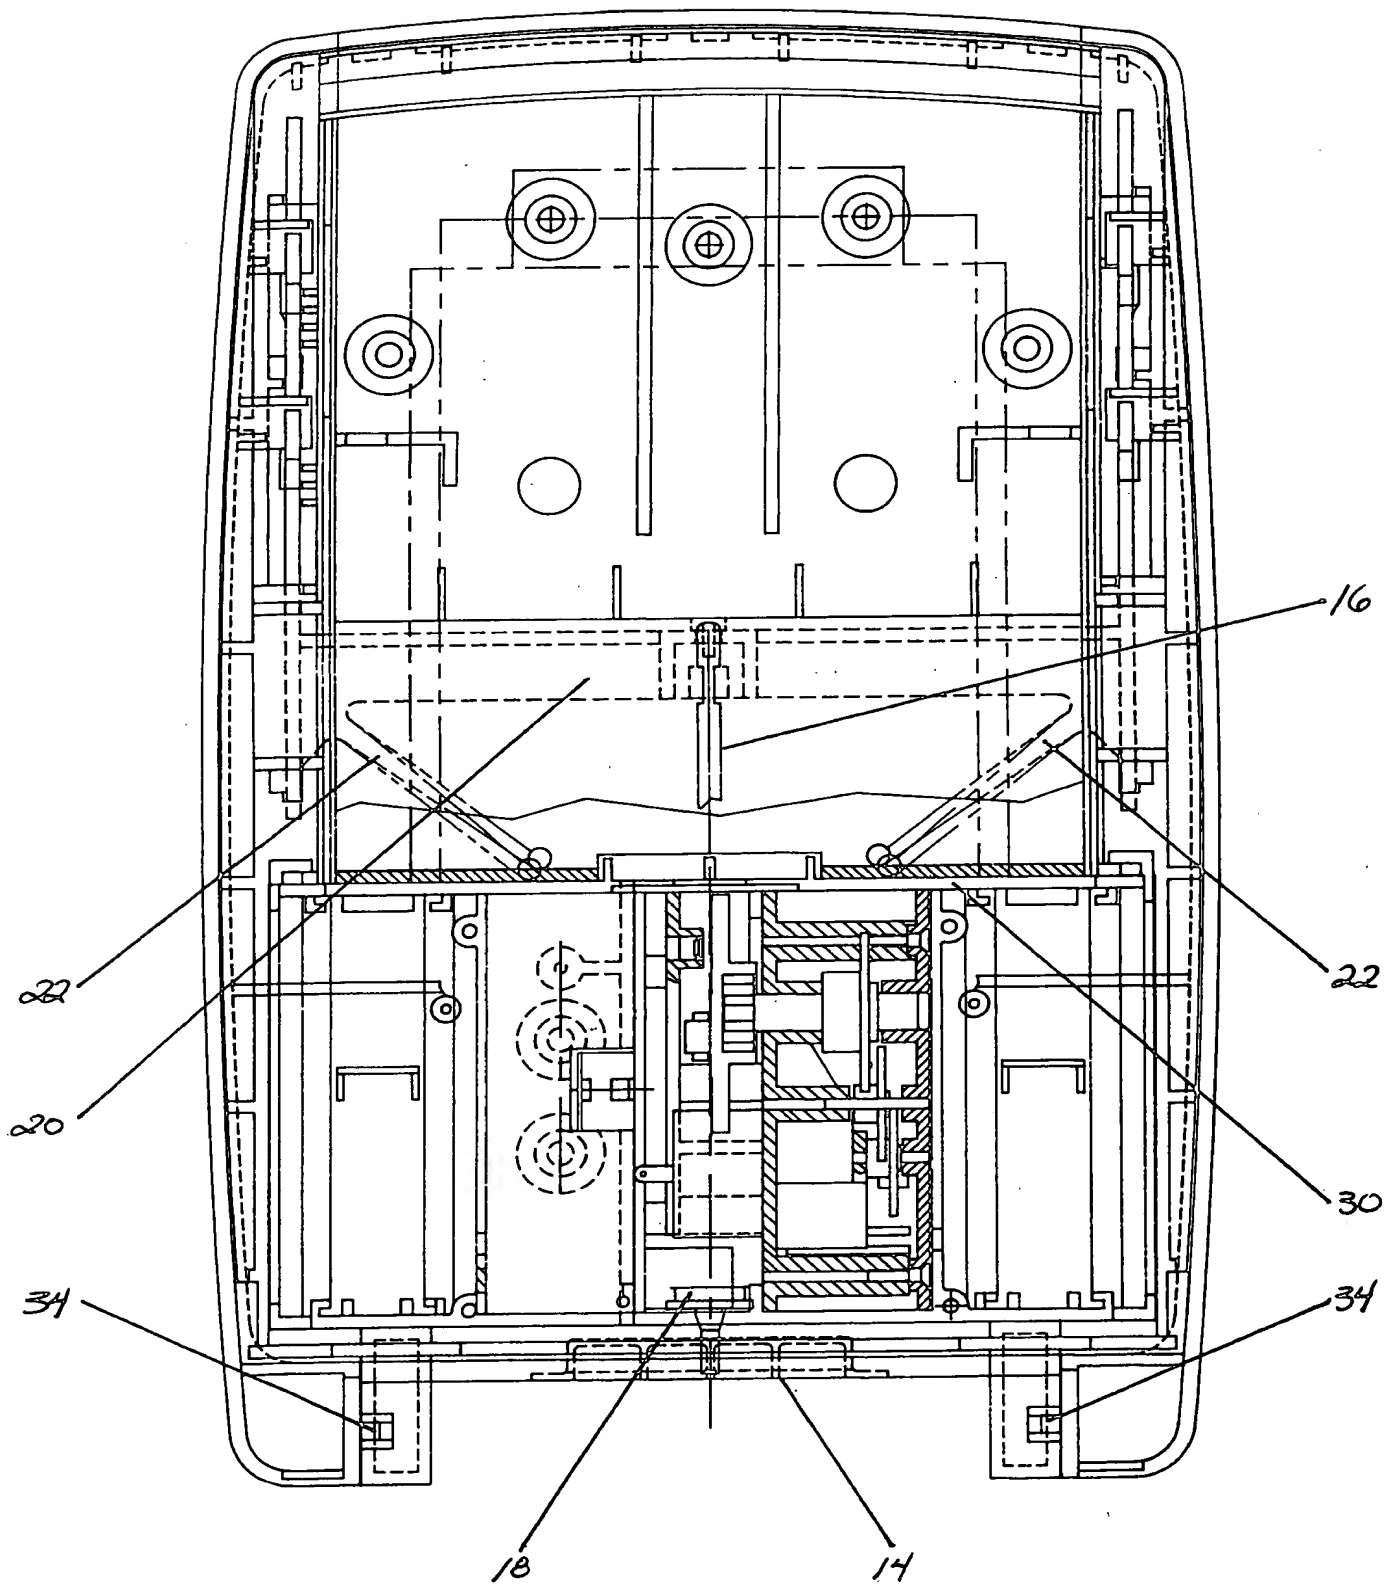


FIG. 4

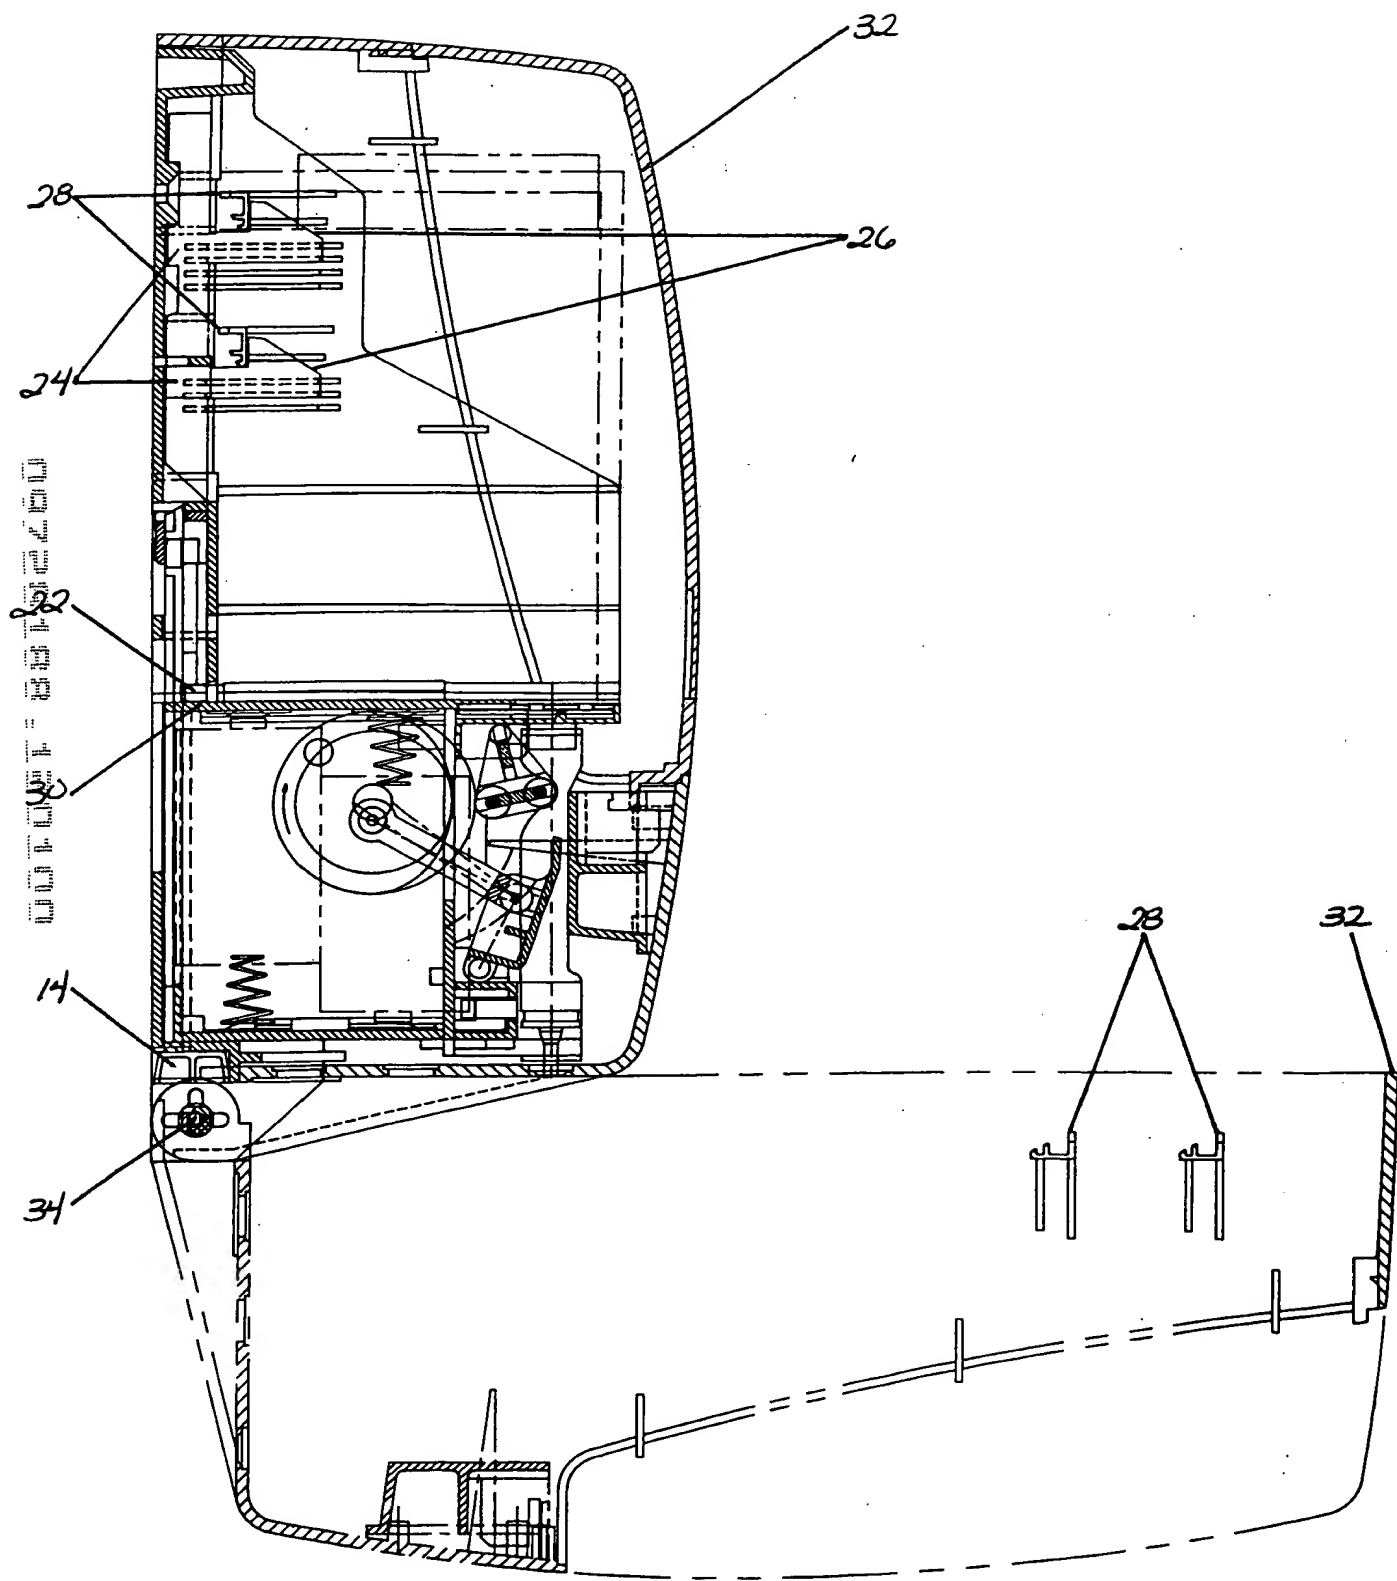


FIG. 5